




## PRINTING AND FITTING INSTRUCTIONS

1. Print this document on A4 sheets of paper (21 x 29.7 cm).
2. Ensure you print at 100% scale.
3. Measure both sides of this box to check the scale is correct.
4. Fit the prints together following the numbering system on the edge of each sheet. Ensure crosses are aligned.
5. Tape the sheets together and cut around the pack's outline.
6. When fitting this printed template to your bike, keep in mind that the fit will be somewhat flexible as the product is built from fabric.

10 cm  
3.9 in

10 cm / 3.9 in


## SCALED EXAMPLE OF FINAL TEMPLATE

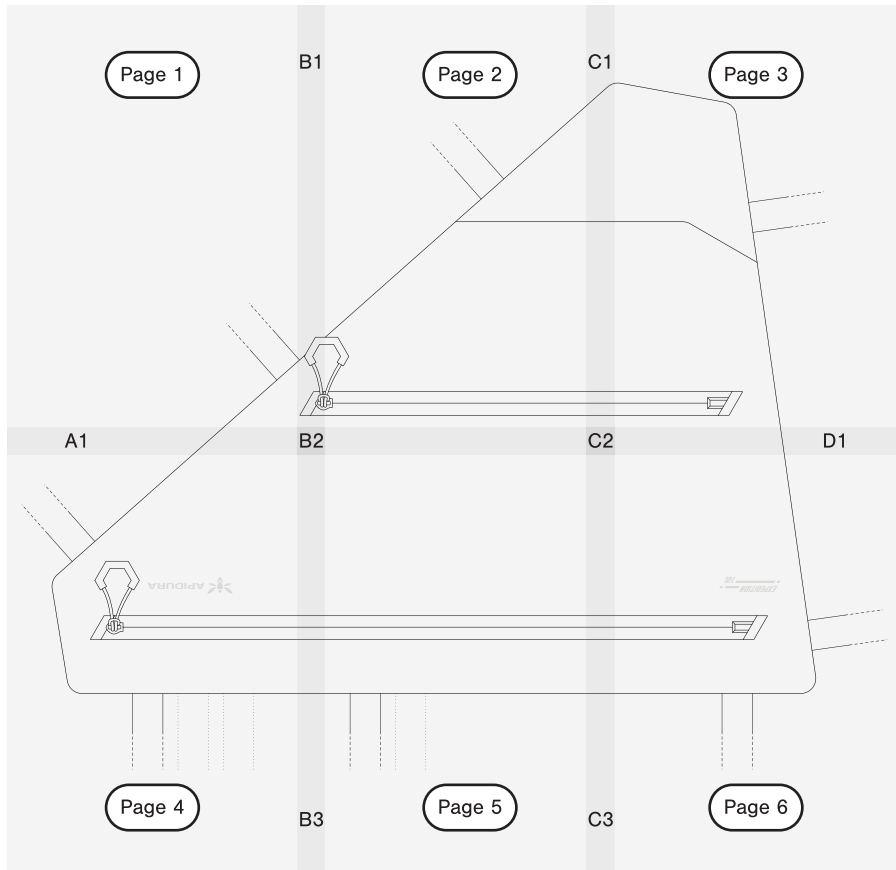


This Hyalon stability strap is  
36 cm long (14.2 in)




This Hypalon stability strap is  
36 cm long (14.2 in)

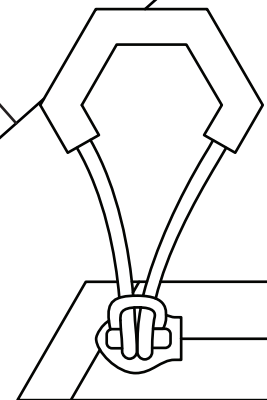

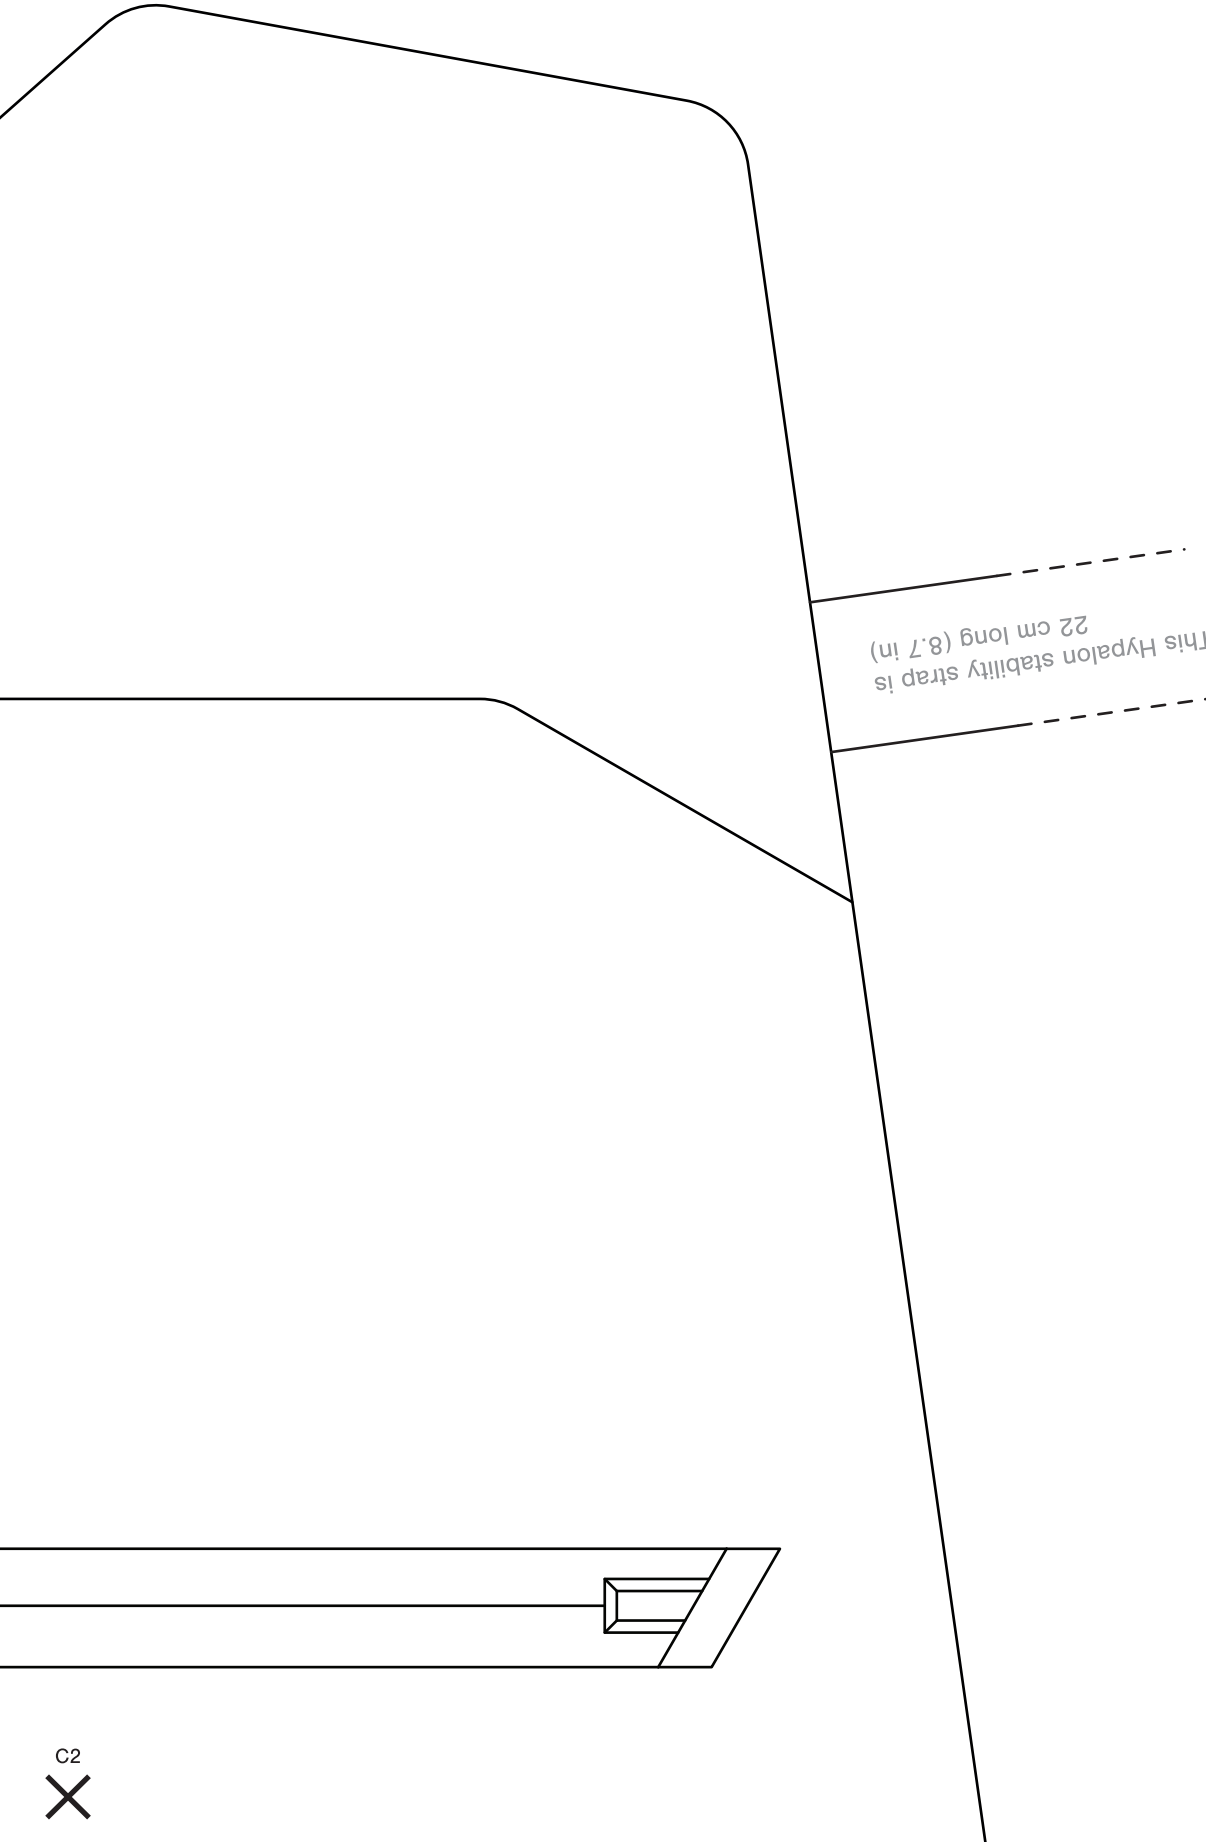

This Hypalon stability strap is  
36 cm long (14.2 in)

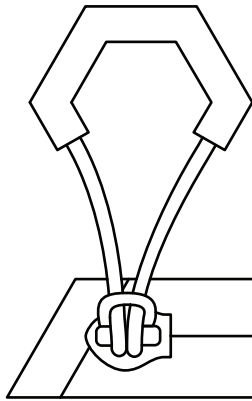

.....  
This Hypalon stability strap is  
22 cm long (8.7 in)  
.....

.....  
Alternative placement for  
Hypalon stability strap  
.....

.....  
Alternative placement for  
Hypalon stability strap  
.....




This Hypalon stability strap is  
22 cm long (8.7 in)

Alternative placement for  
Hypalon stability strap



EXPEDITION  
10L

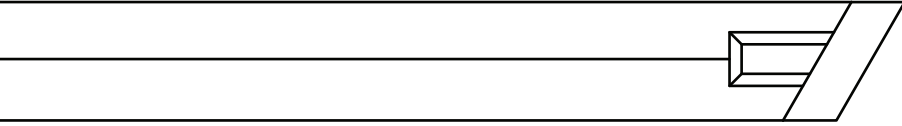

This Hypalon stability strap is  
22 cm long (8.7 in)

EXPEDITION  
FULL FRAME PACK  
10L

This Hypalon stability strap is  
22 cm long (8.7 in)